


ENLOUVA IIIA 22' REMOTE

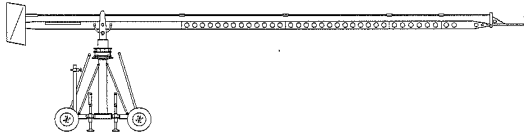

Technical Specifications

Height

Remote		Ridable	
Max.	23' 6"	Max.	12' 2"
Min.	11' 6"	Min.	12' 2"

Length

Remote		Ridable	
Max.	22' 6"	Max.	8' 2"
Min.	7' 6"	Min.	8' 2"

Weight

Max Remote		Max Ridable	
Arm and Base	1900 lbs.	Arm and Base	3500 lbs.
With Max. Payload of 125 lbs.		With Max. Payload of 506 lbs.	

VERSION GUIDE

Remote

Height	Length	Payload
11' 6"	7' 6"	187 lbs.
13' 6"	10' 6"	187 lbs.
16' 6"	13' 6"	187 lbs.
18' 9"	16' 6"	187 lbs.
21' 3"	19' 6"	154 lbs.
23' 6"	22' 6"	125 lbs.

!! Caution !!

Some weights listed are an approximation. Different cameras, heads, and accessories will alter payload weight, counterweight, and consequently total weight.

ENLOUVA IIIA 22'

Arm Pieces	
Length	3' and 6'
Width	5"
Height	5"
Weight	Main Arm 6' 43 lbs., 3' 21 lbs.
Pieces	Main Arm 2, 3'

Arm Clearance	
Width	7"
Height	11"

Nose	
Length	2' 9" (33")
Width	7"
Height	10"
Weight	33 lbs.

Bucket	
Width	1' 11" (23")
Height	2' 8" (32")
Depth	1' (12")
Weight	61 lbs.

Weights	
35 Large @ 26 lbs	
2 Small @ 13 lbs	

Set-Up Time	
Approx. 20 min. w/two people	

Technician Required	
Yes	<input type="checkbox"/>
No	<input checked="" type="checkbox"/>

Base	
Length	5' 4" (64")
Width	Approx. 4' 10" (58")
Height	7' (84")
Weight	345 lbs.


Track	
24 1/2" or 32" Round	

Steering	
Conventional	
Crab*	
Round*	

*When equipped with 2 sided steering. Contact source.

Transportation Weight	
Approximately 2200 lbs.	

Transport Vehicle	
12' Cube Van, or larger	

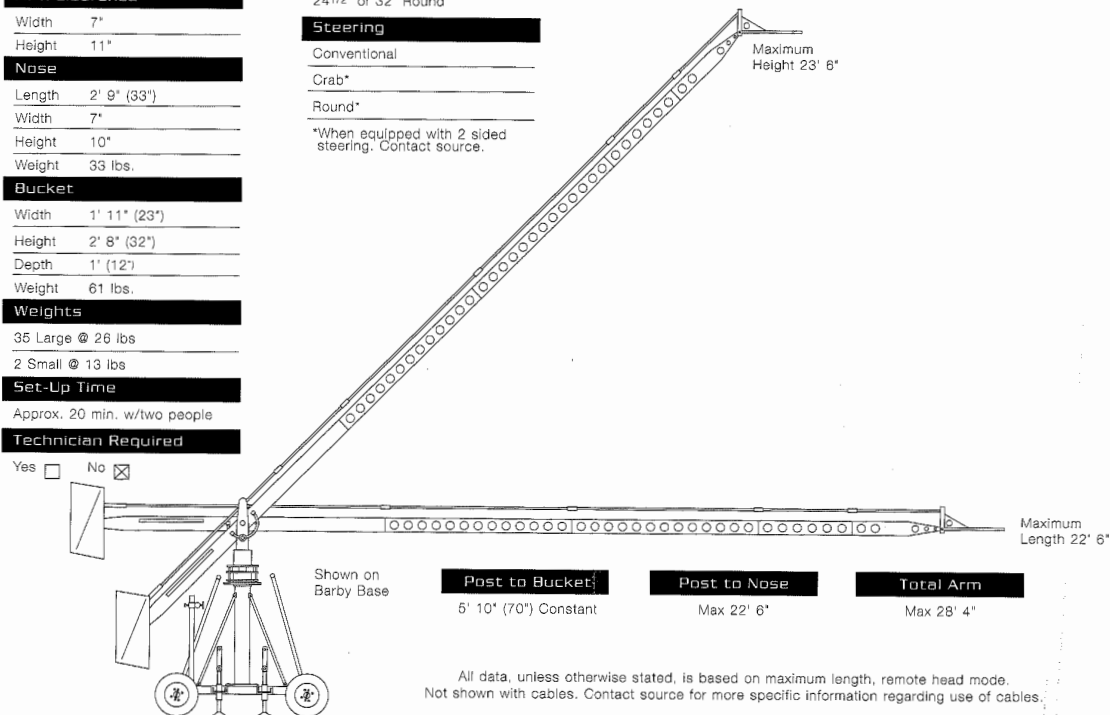

Post to Bucket	Post to Nose	Total Arm
5' 10" (70") Constant	Max 22' 6"	Max 28' 4"

All data, unless otherwise stated, is based on maximum length, remote head mode. Not shown with cables. Contact source for more specific information regarding use of cables.

H HIGH OUTPUT